Unsupervised Learning:
Deep Auto-encoder

Auto-encoder

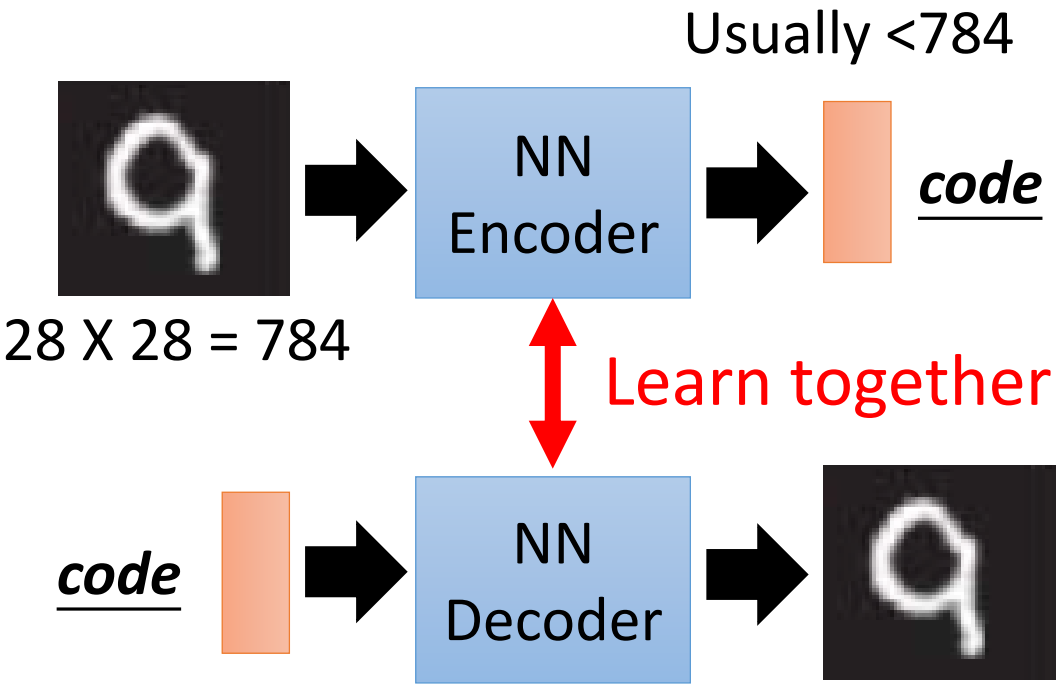

Compact representation of the input object

Can reconstruct the original object

Starting from PCA

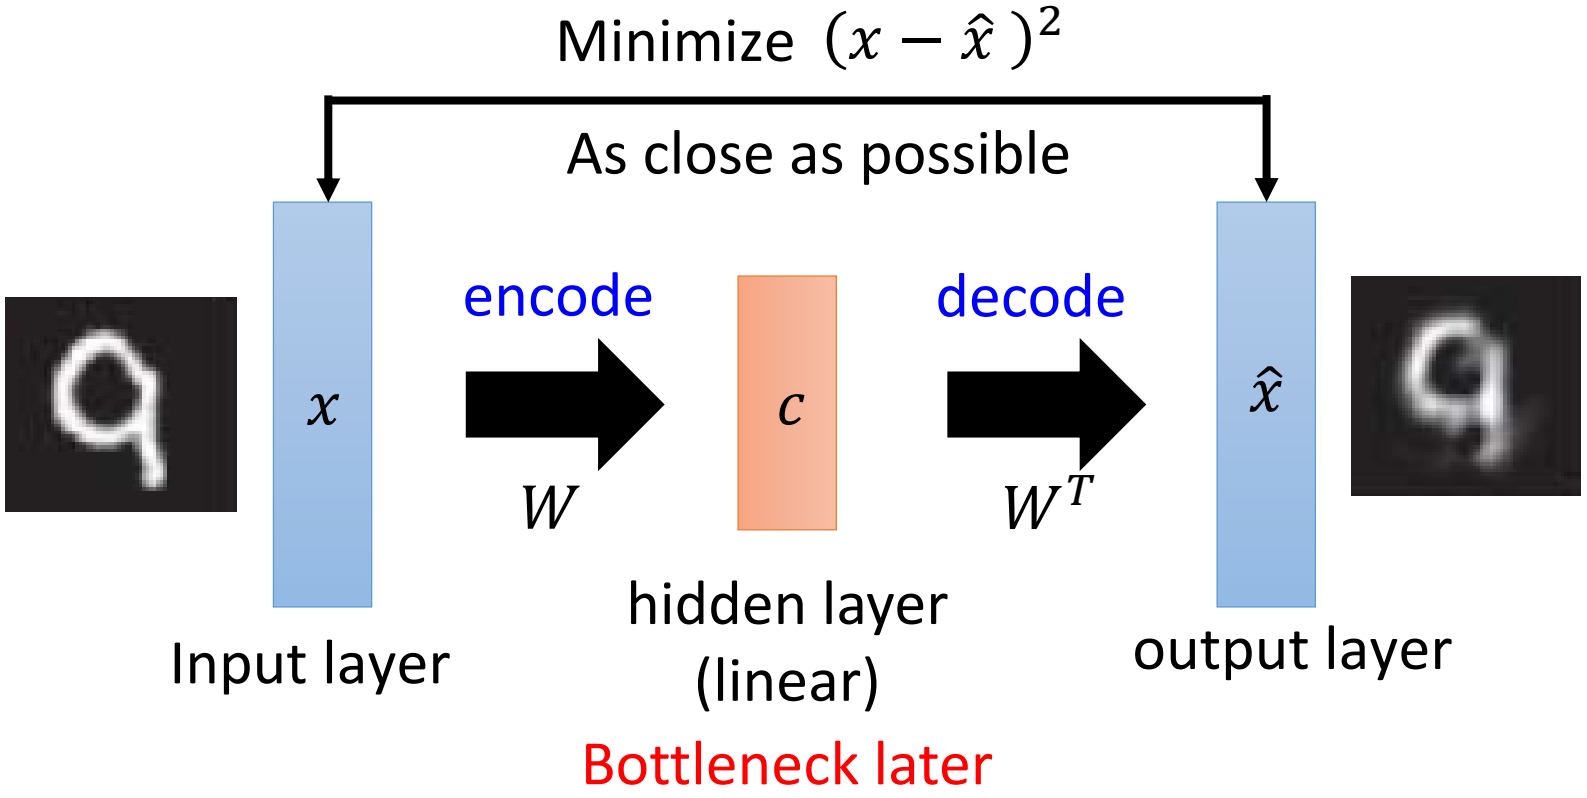

Output of the hidden layer is the code

Deep Auto-encoder

Symmetric is not necessary.

- Of course, the auto-encoder can be deep

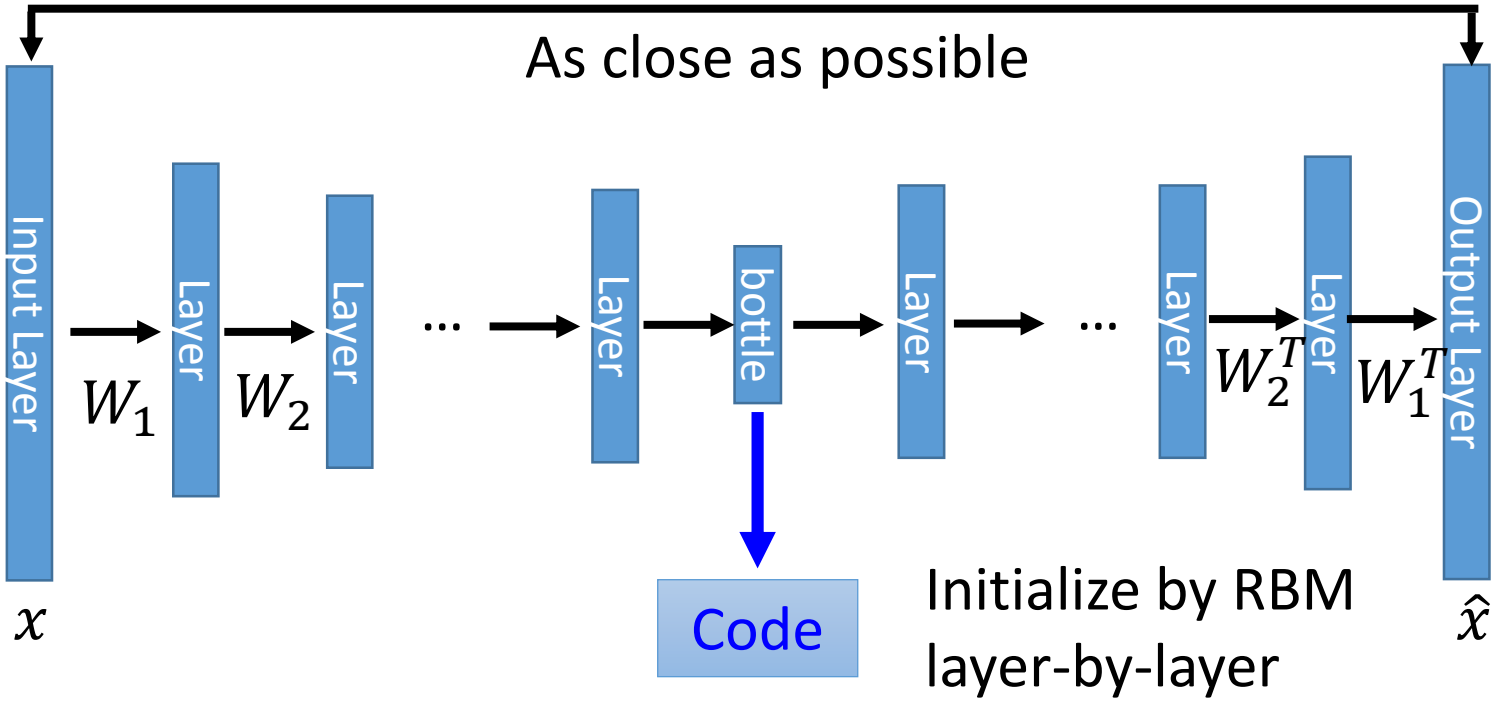

Reference: Hinton, Geoffrey E., and Ruslan R. Salakhutdinov. "Reducing the dimensionality of data with neural networks." *Science* 313.5786 (2006): 504-507

Deep Auto-encoder

Original Image

PCA

Deep Auto-encoder

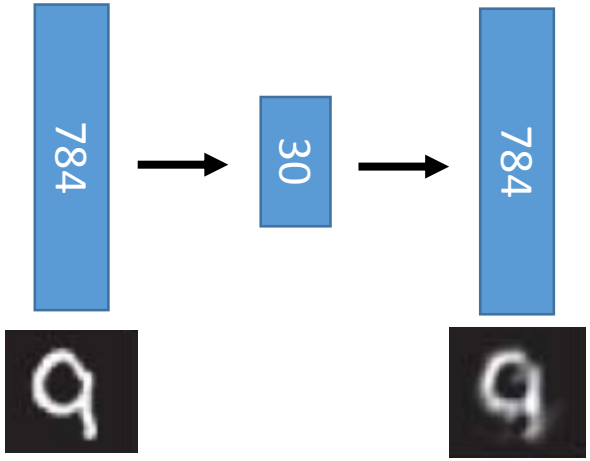

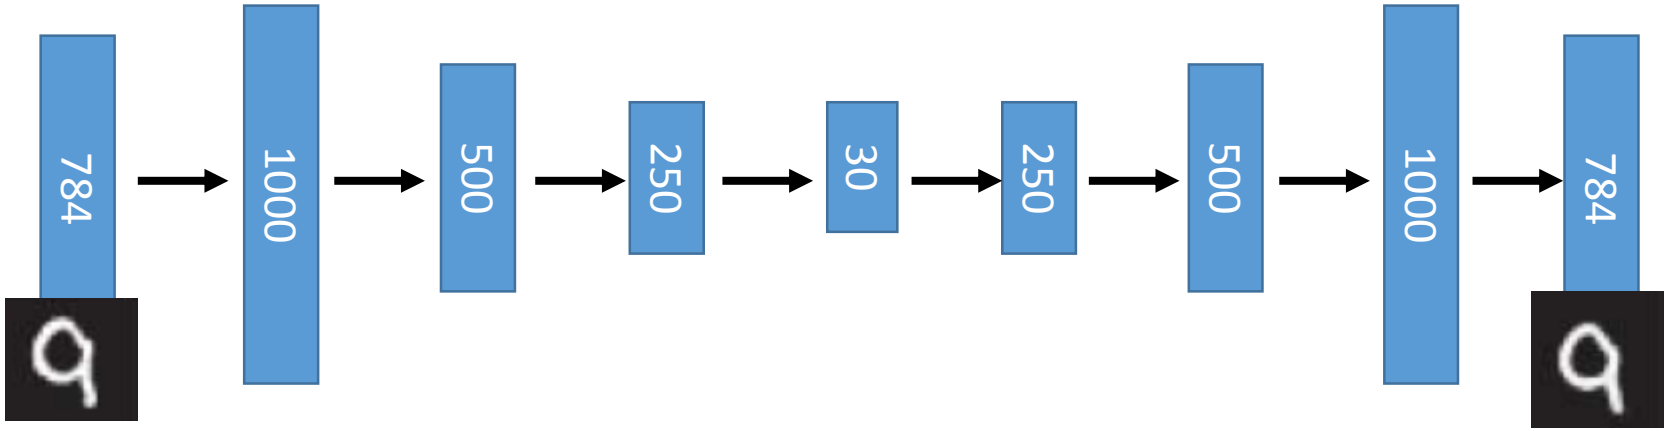

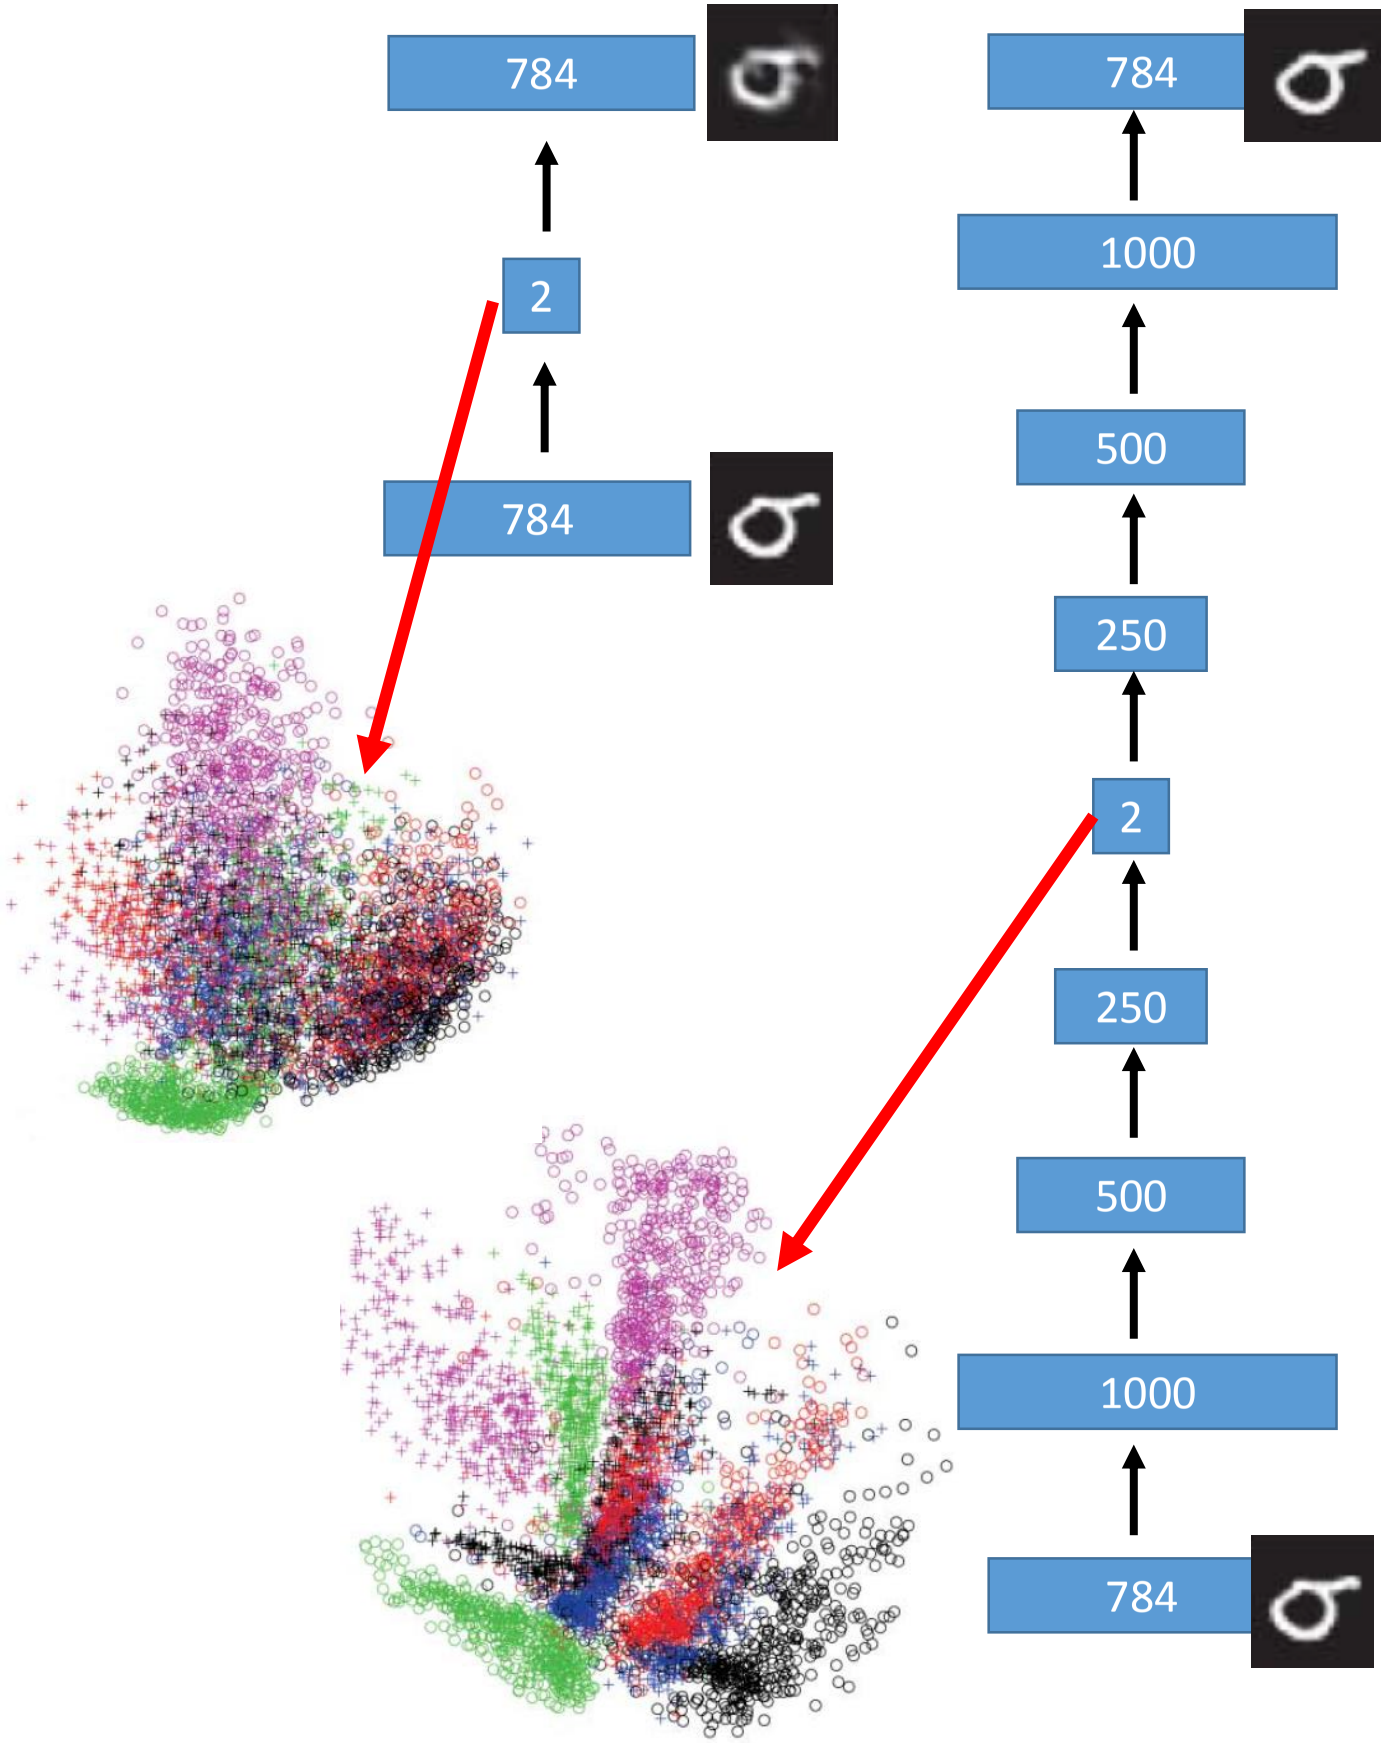
784
2
784
784
1000
500
250
2
250
500
1000
784

Pokémon

- http://140.112.21.35:2880/~tlkagk/pokemon/pca.html
- http://140.112.21.35:2880/~tlkagk/pokemon/auto.html
- The code is modified from
  - http://jkunst.com/r/pokemon-visualize-em-all/

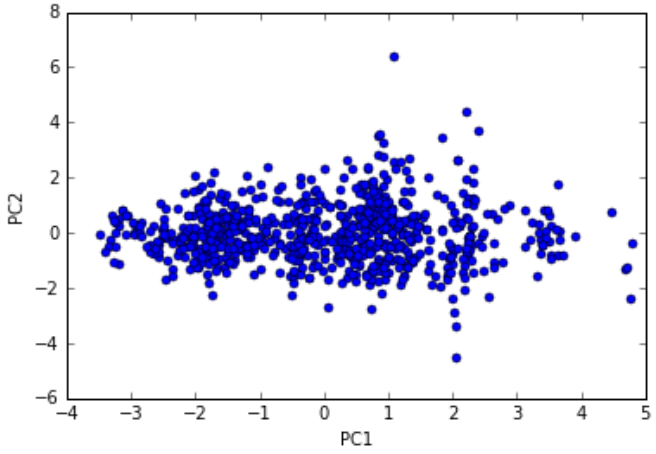

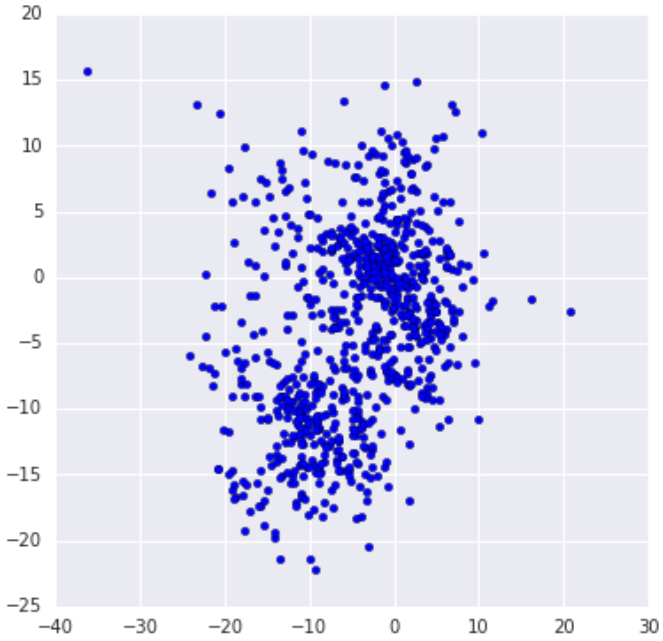

Auto-encoder – Text Retrieval

Vector Space Model

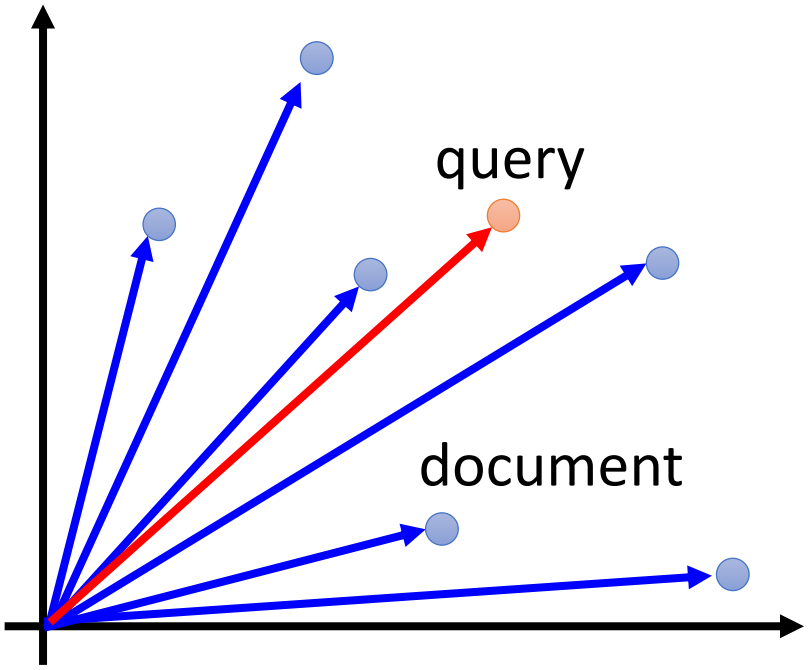

Bag-of-word

word string:
"This is an apple"

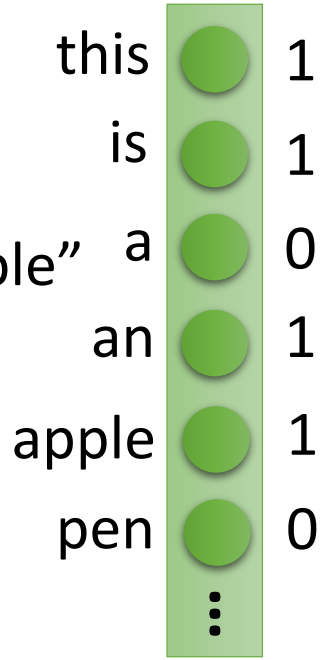

Semantics are not considered.

Auto-encoder – Text Retrieval

The documents talking about the same thing will have close code.

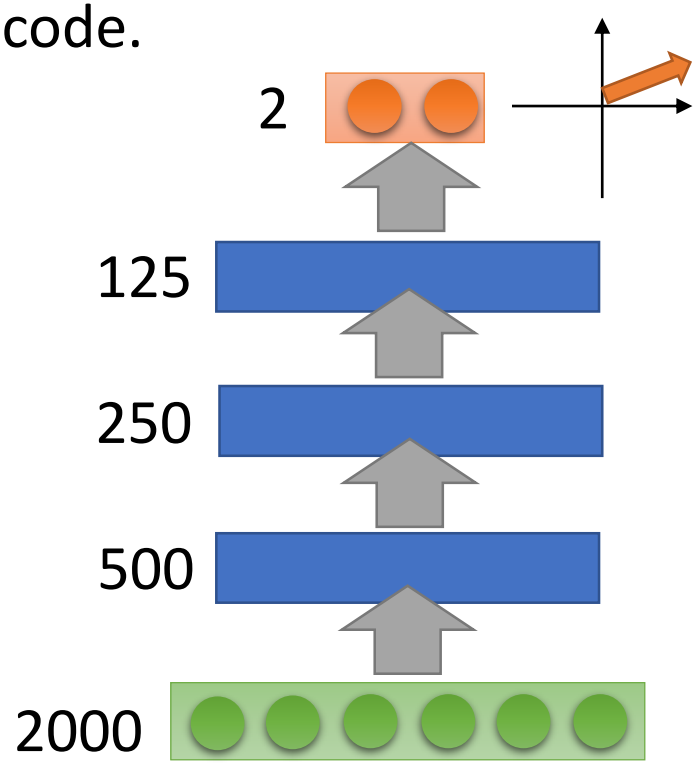

Bag-of-word

(document or query)

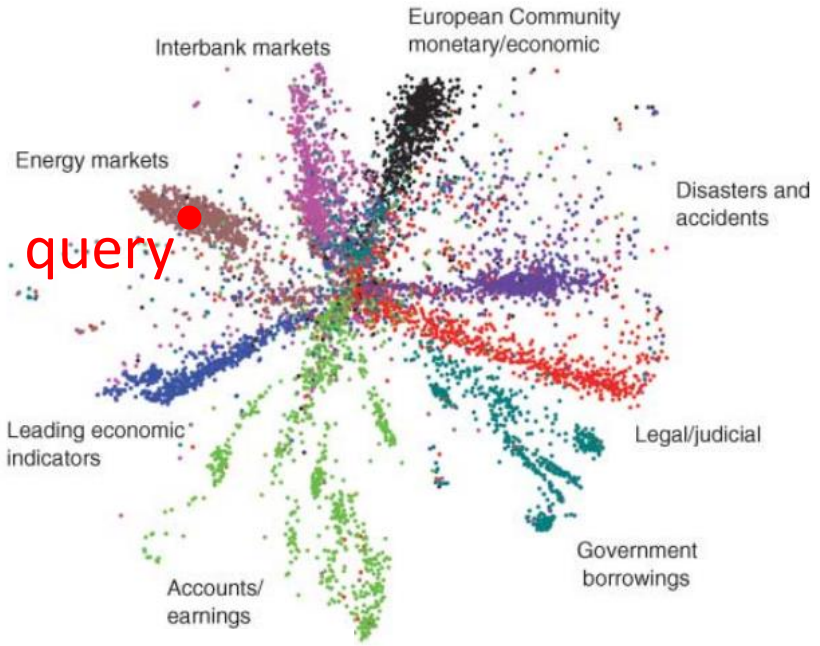

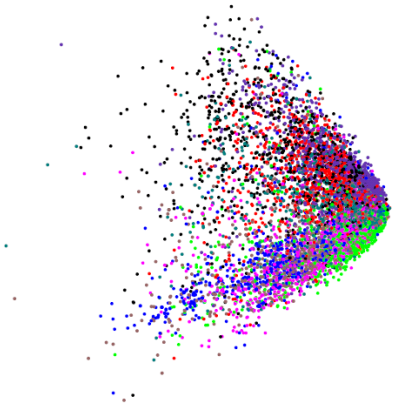

LSA: project documents to 2 latent topics

Auto-encoder – Similar Image Search

Retrieved using Euclidean distance in pixel intensity space

(Images from Hinton's slides on Coursera)

Reference: Krizhevsky, Alex, and Geoffrey E. Hinton. "Using very deep autoencoders for content-based image retrieval." *ESANN*. 2011.

Auto-encoder – Similar Image Search

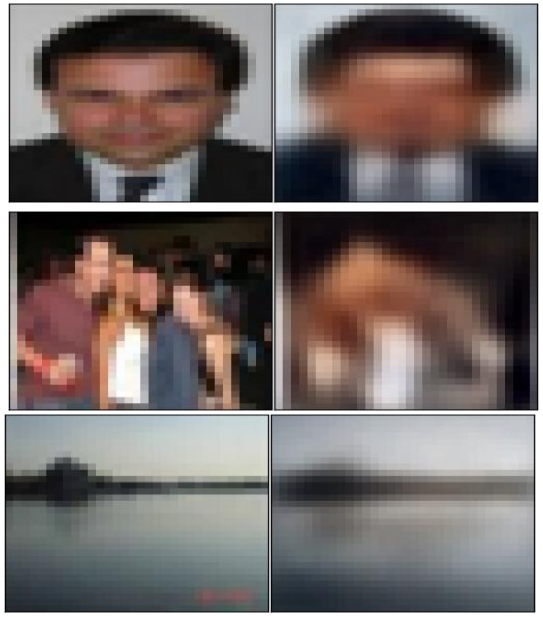

32x32

8192

4096

2048

1024

512

code

256

(crawl millions of images from the Internet)

Retrieved using Euclidean distance in pixel intensity space

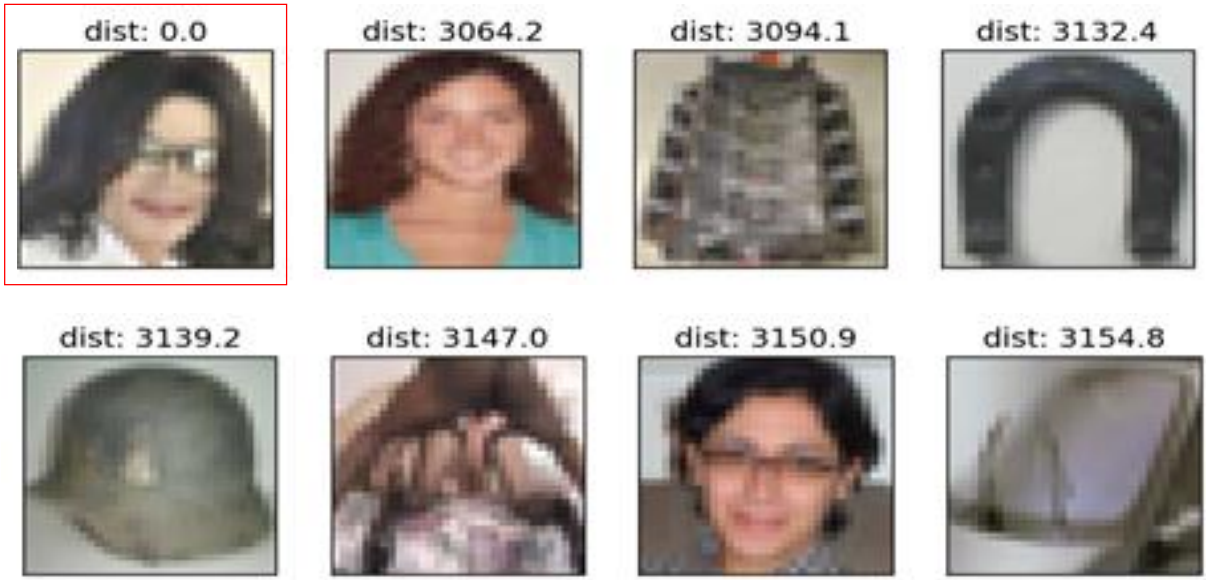

retrieved using 256 codes

Auto-encoder – Pre-training DNN

- Greedy Layer-wise Pre-training *again*

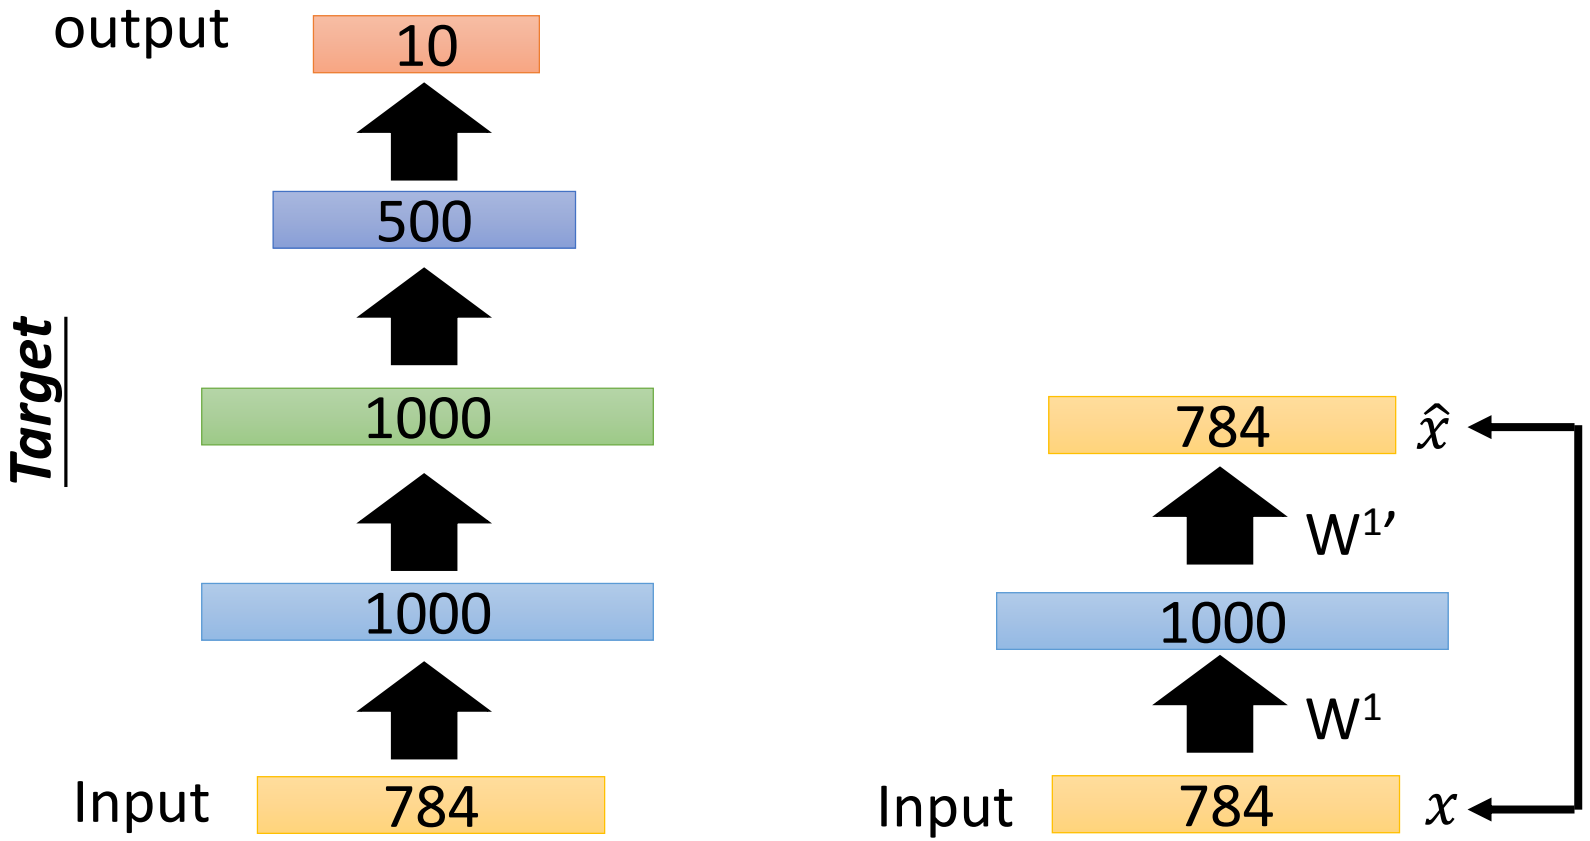

Auto-encoder – Pre-training DNN

- Greedy Layer-wise Pre-training *again*

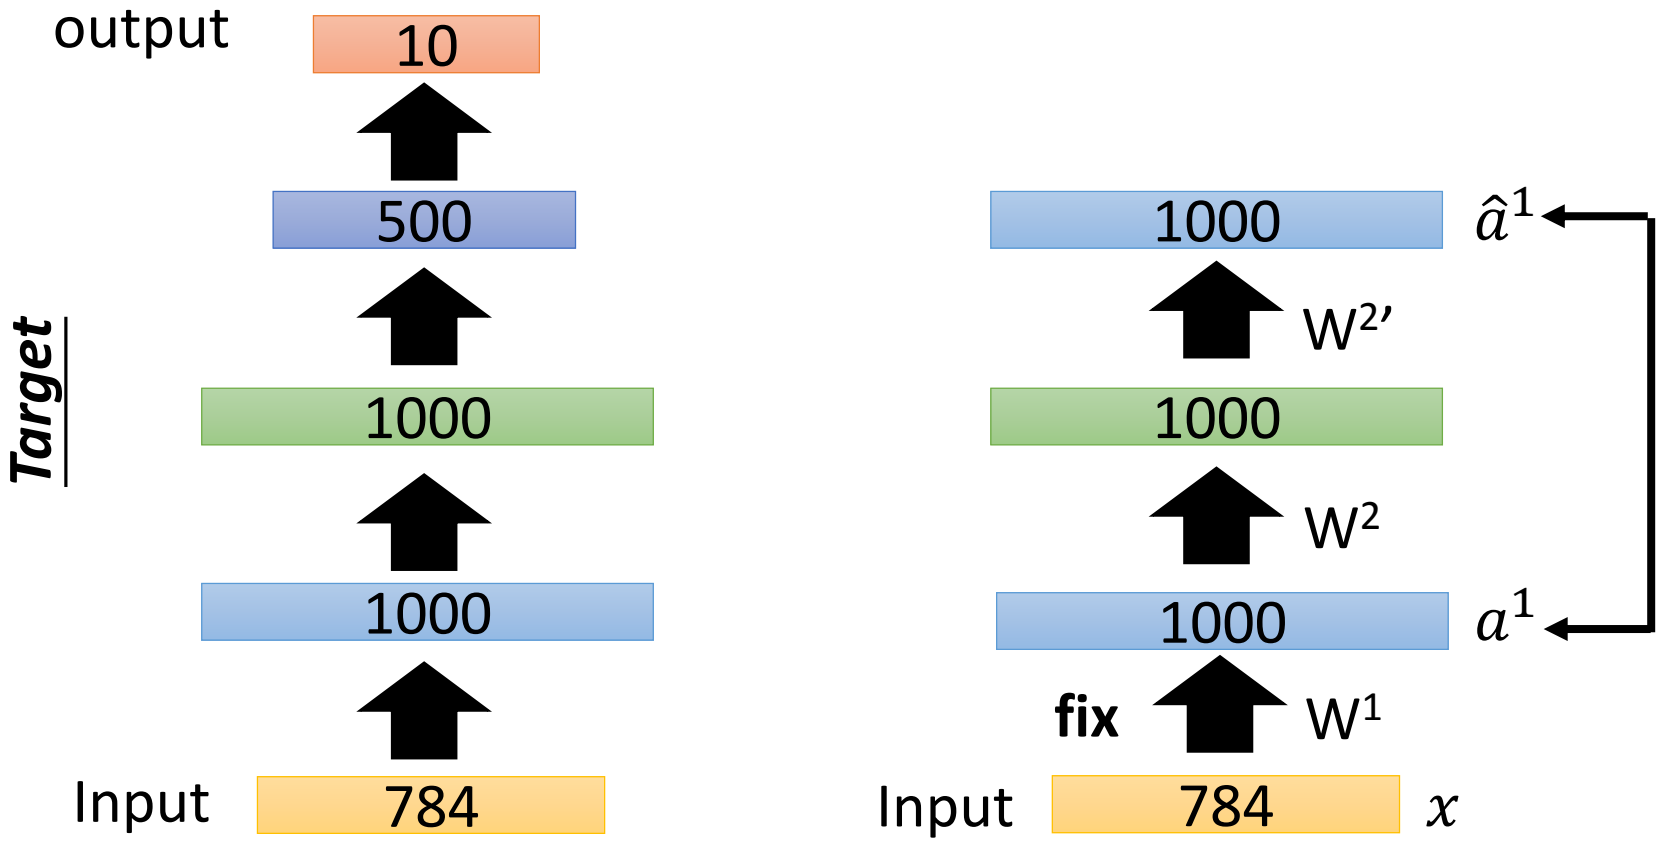

Auto-encoder – Pre-training DNN

- Greedy Layer-wise Pre-training *again*

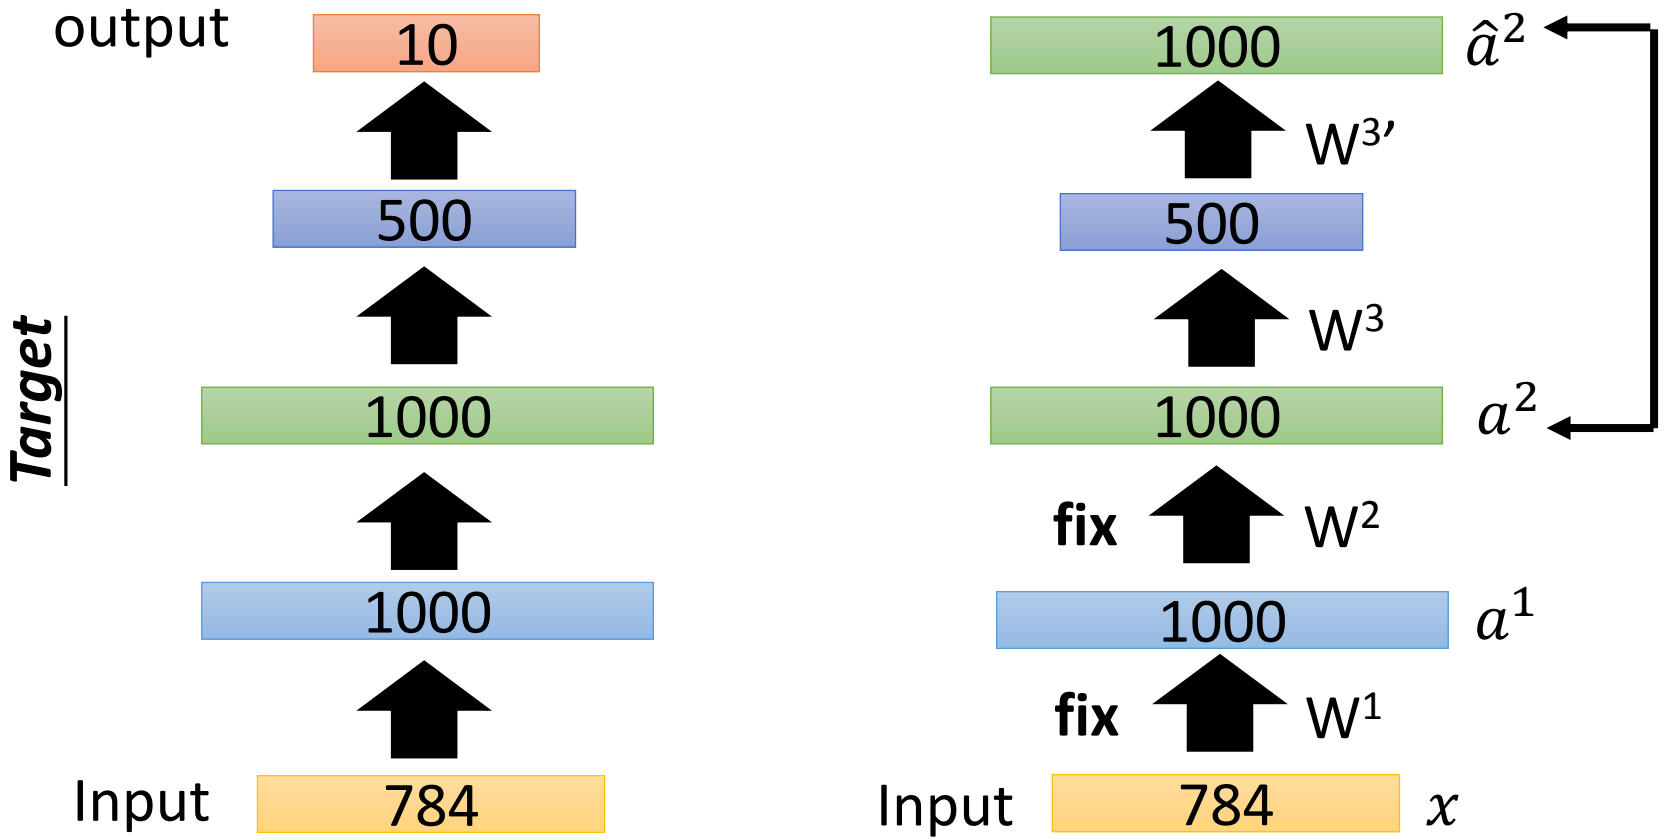

Auto-encoder – Pre-training DNN

- Greedy Layer-wise Pre-training *again*

Find-tune by backpropagation

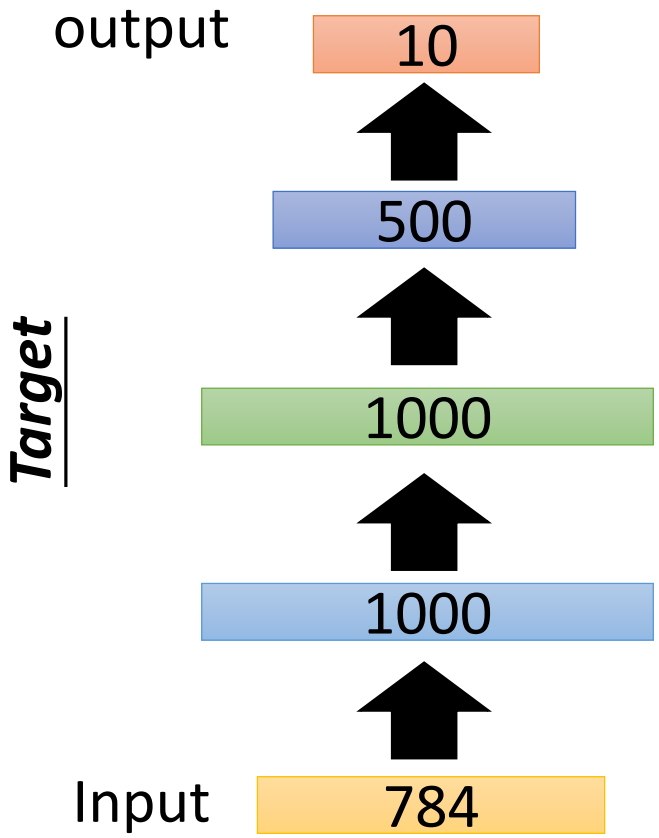

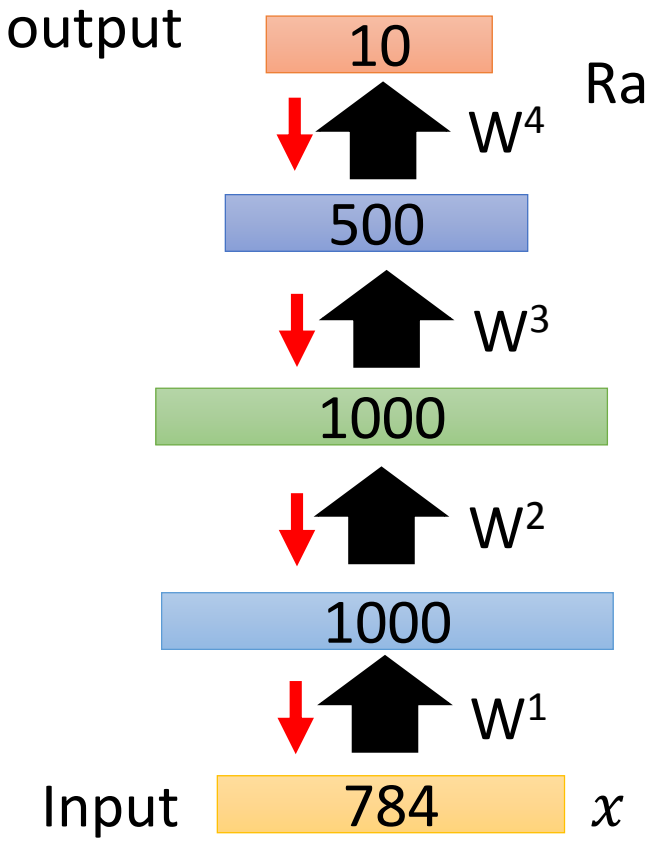

More: Contractive auto-encoder

Auto-encoder

Ref: Rifai, Salah, et al. "Contractive auto-encoders: Explicit invariance during feature extraction." *Proceedings of the 28th International Conference on Machine Learning (ICML-11)*. 2011.

- De-noising auto-encoder

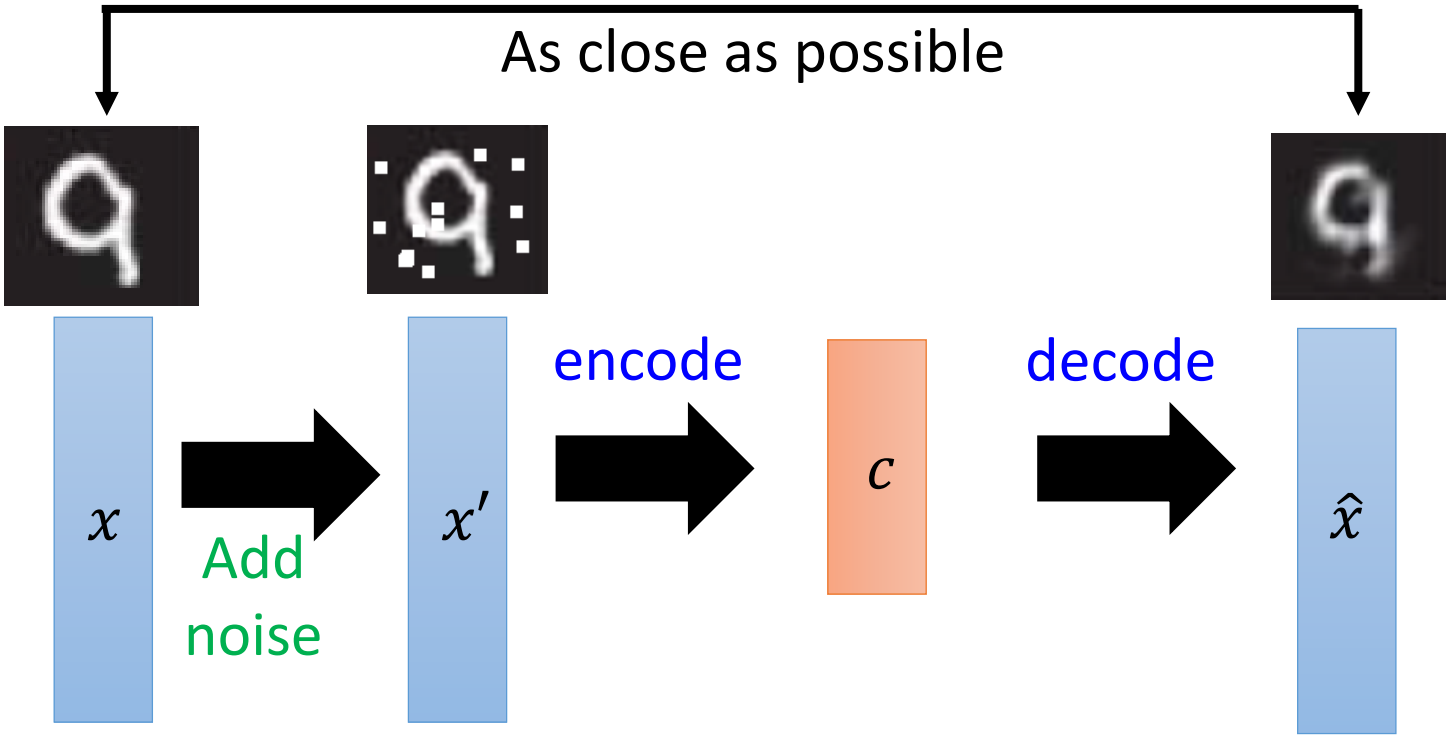

Vincent, Pascal, et al. "Extracting and composing robust features with denoising autoencoders." *ICML,* 2008.

Learning More
- Restricted Boltzmann Machine

- Neural networks [5.1] : Restricted Boltzmann machine – definition
  - https://www.youtube.com/watch?v=p4Vh_zMw-HQ&index=36&list=PL6Xpj9I5qXYEcOhn7TqghAJ6NAPrNmUBH
- Neural networks [5.2] : Restricted Boltzmann machine – inference
  - https://www.youtube.com/watch?v=lekCh_i32iE&list=PL6Xpj9I5qXYEcOhn7TqghAJ6NAPrNmUBH&index=37
- Neural networks [5.3] : Restricted Boltzmann machine - free energy
  - https://www.youtube.com/watch?v=e0Ts_7Y6hZU&list=PL6Xpj9I5qXYEcOhn7TqghAJ6NAPrNmUBH&index=38

Learning More
- Deep Belief Network

- Neural networks [7.7] : Deep learning - deep belief network
  - https://www.youtube.com/watch?v=vkb6AWYXZ5I&list=PL6Xpj9I5qXYEcOhn7TqghAJ6NAPrNmUBH&index=57
- Neural networks [7.8] : Deep learning - variational bound
  - https://www.youtube.com/watch?v=pStDscJh2Wo&list=PL6Xpj9I5qXYEcOhn7TqghAJ6NAPrNmUBH&index=58
- Neural networks [7.9] : Deep learning - DBN pre-training
  - https://www.youtube.com/watch?v=35MUlYCColk&list=PL6Xpj9I5qXYEcOhn7TqghAJ6NAPrNmUBH&index=59

Auto-encoder for CNN

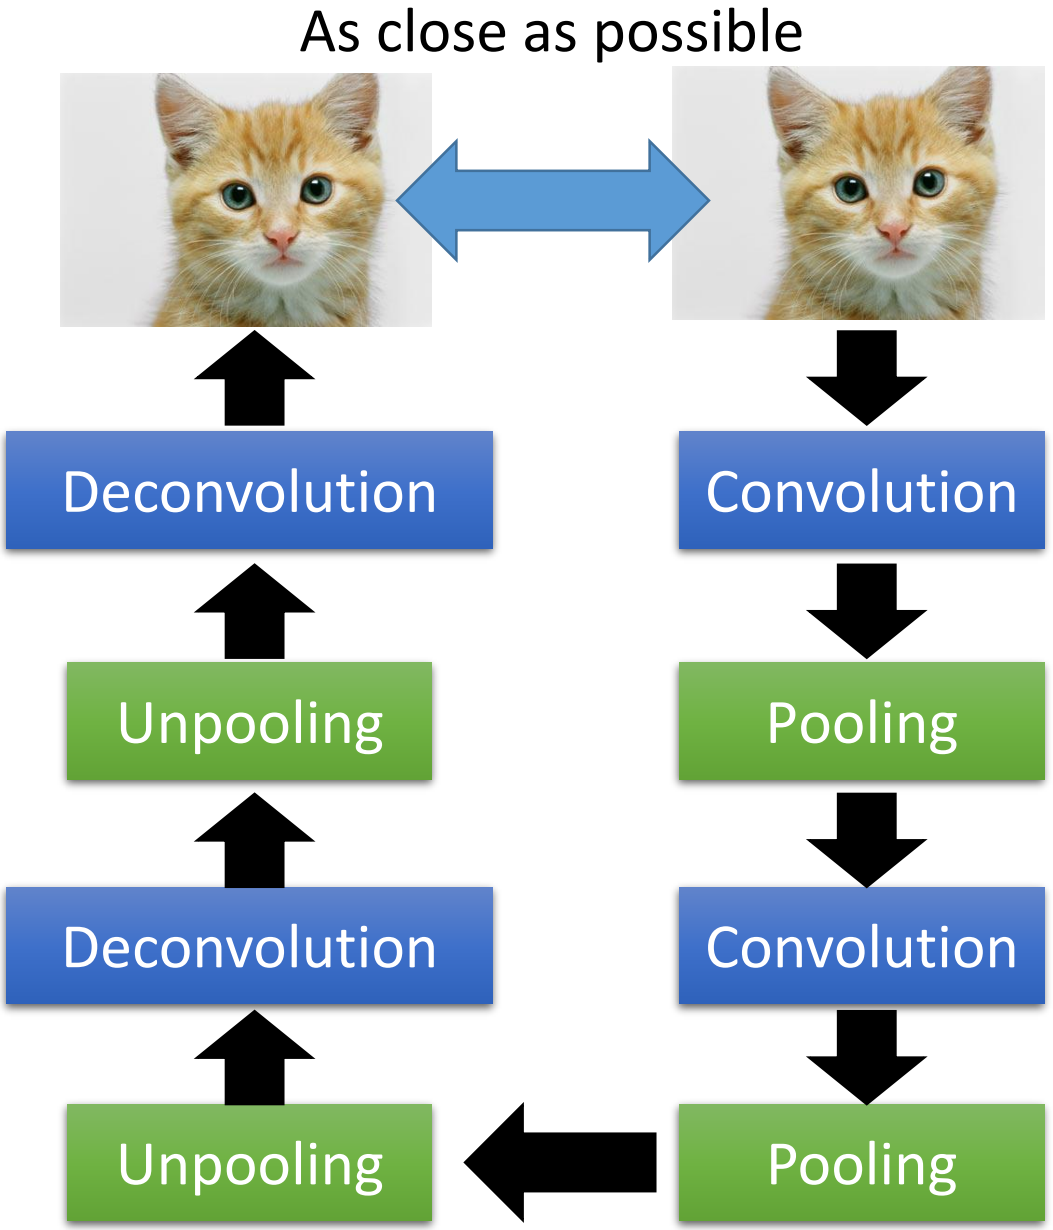

CNN -Unpooling

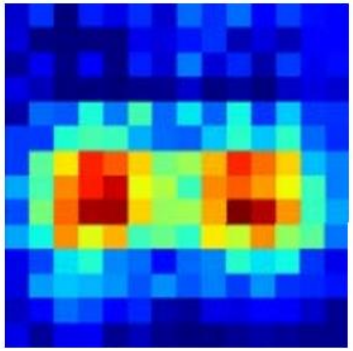

14 x 14

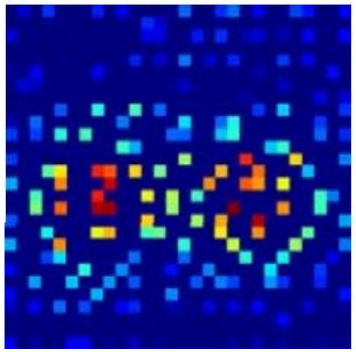

28 x 28

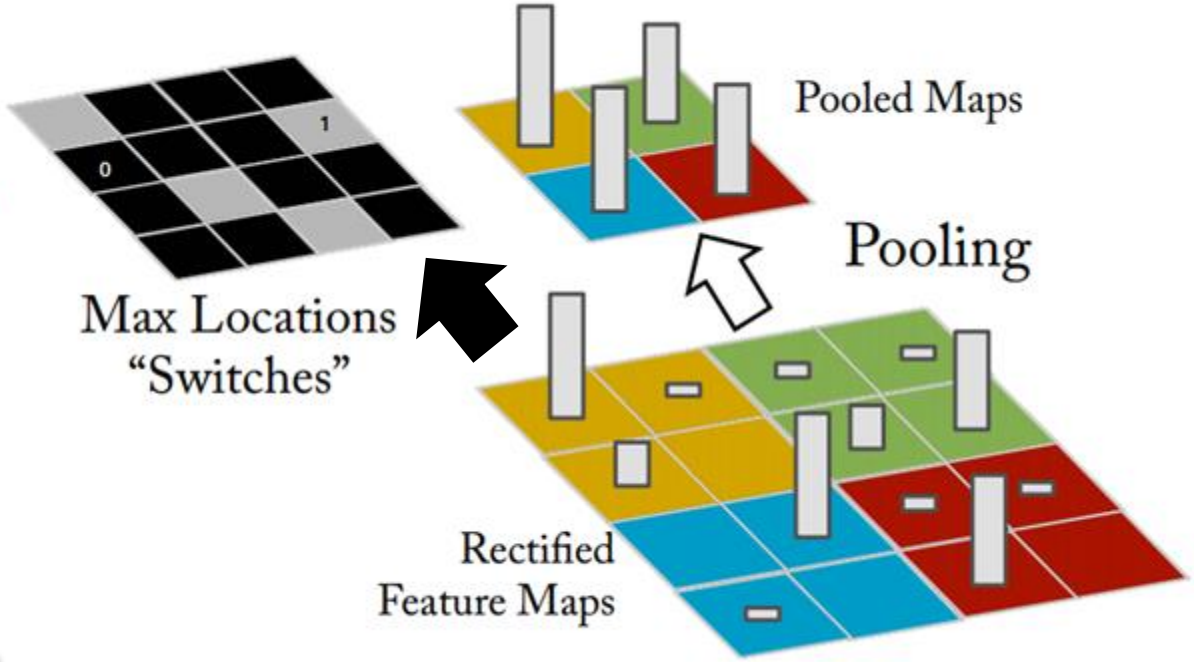

Alternative: simply repeat the values

Source of image : https://leonardoaraujosantos.gitbooks.io/artificial-inteligence/content/image_segmentation.html

CNN
- Deconvolution

Actually, deconvolution is convolution.

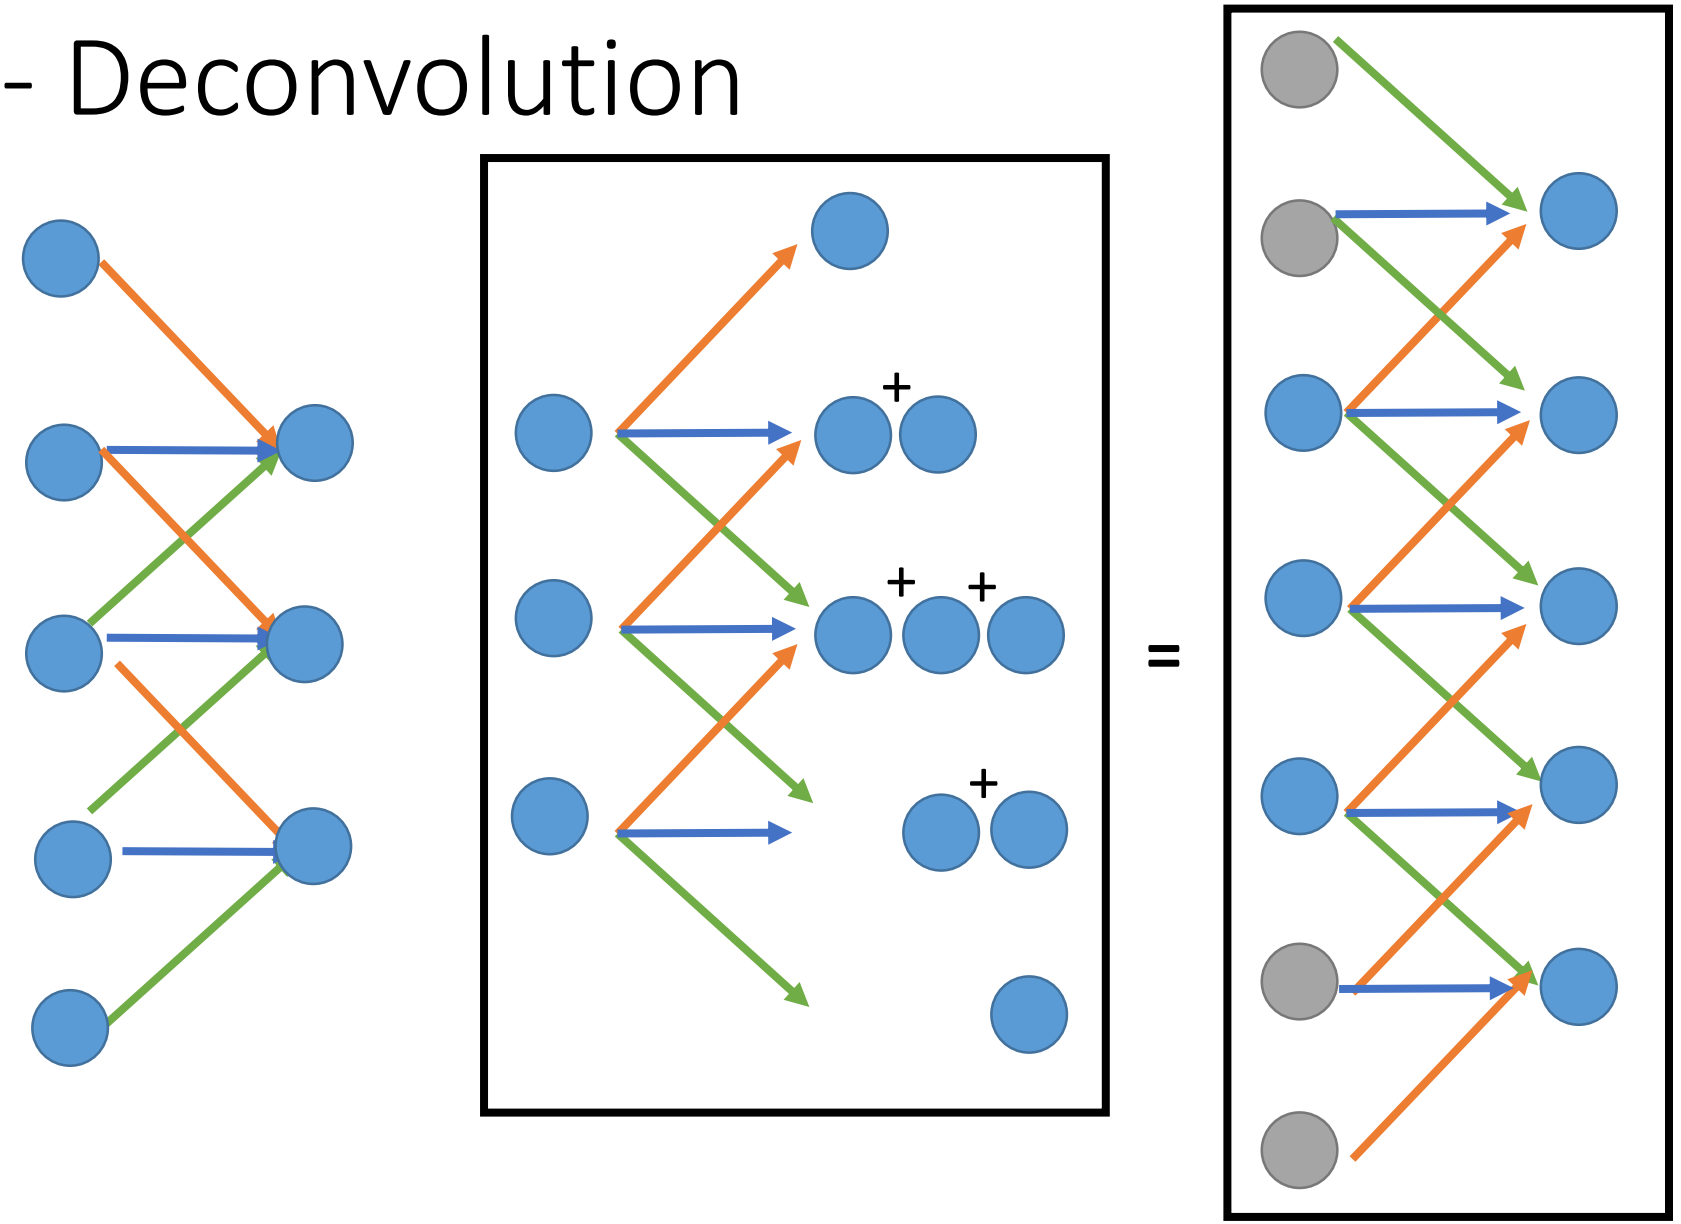

Next .....

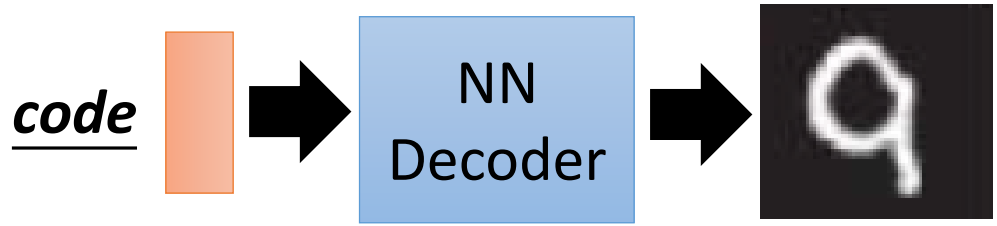

- Can we use decoder to generate something?

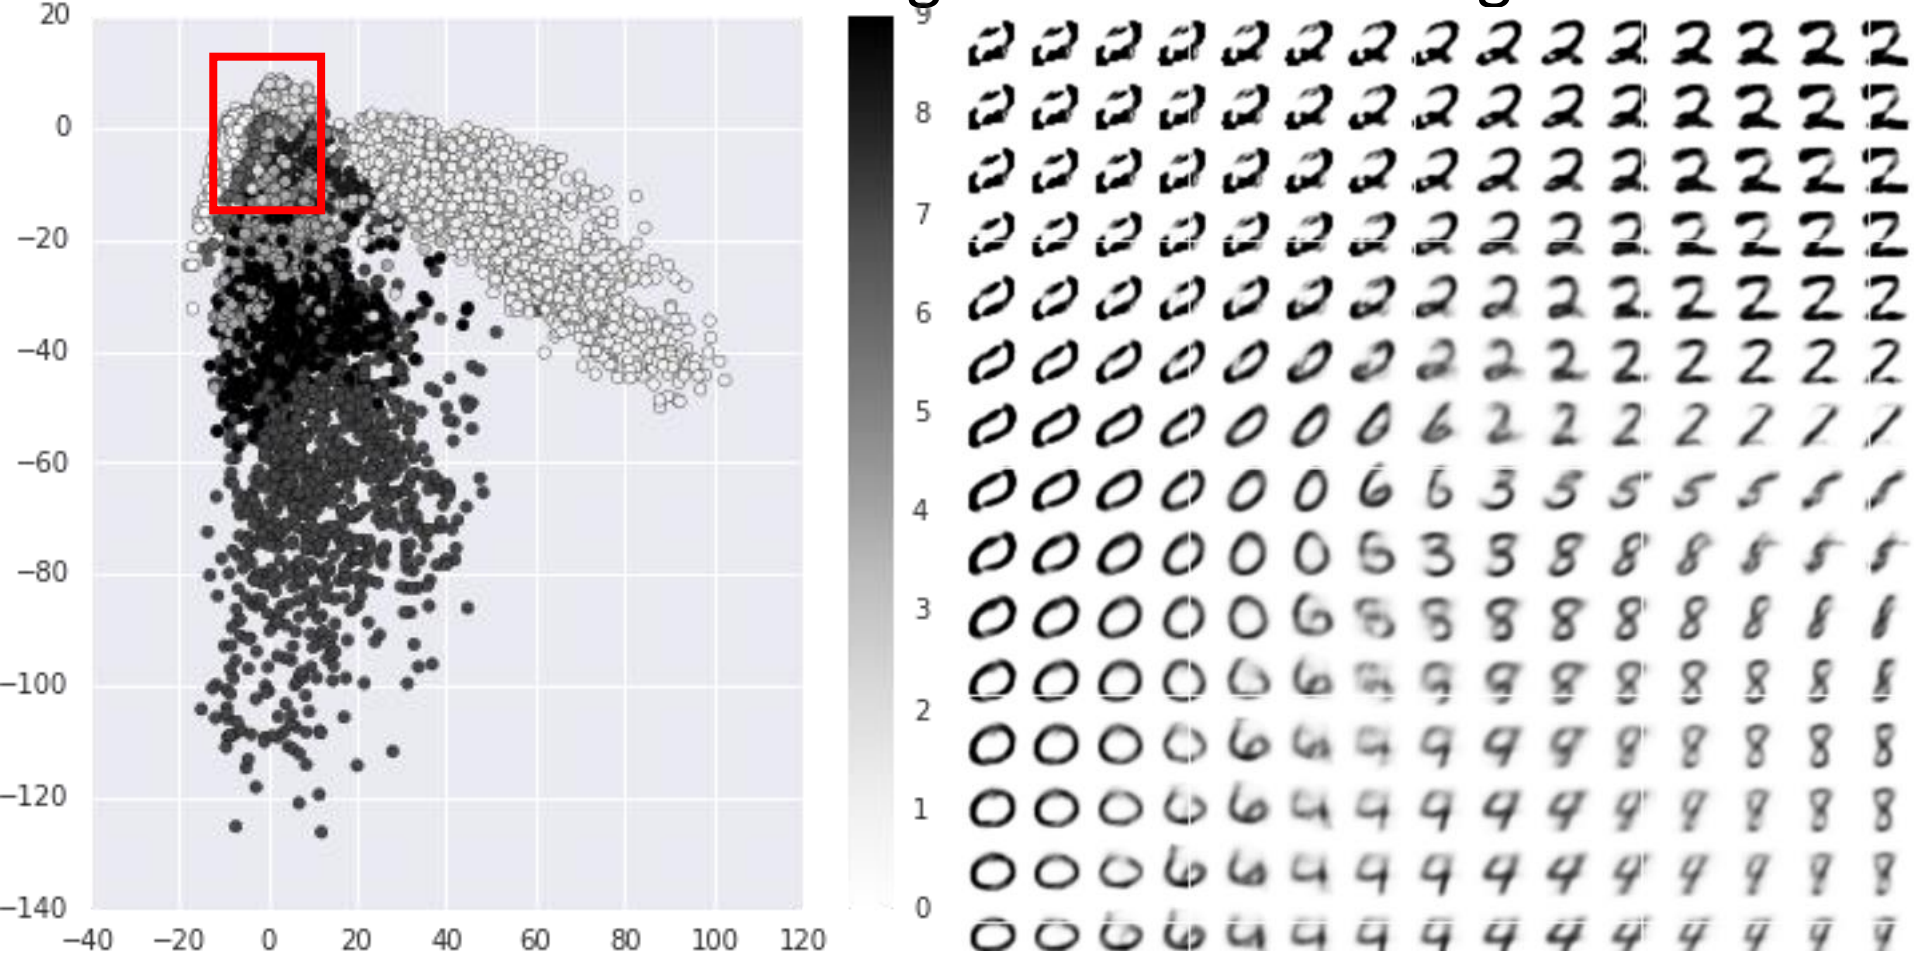

Next .....

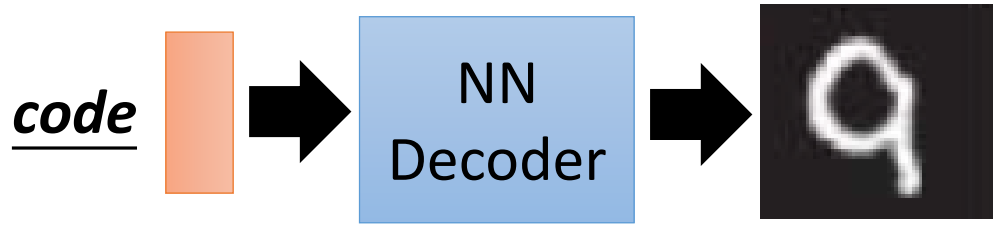

- Can we use decoder to generate something?